


62 Series Continued

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

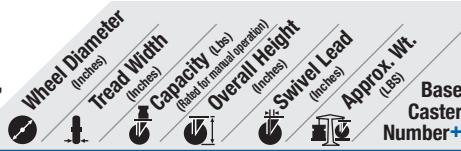

X-tra Soft Round Tread (01 Roller Bearing)*

XR	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	6	2	450	7 1/2	1 3/4	8 1/4	62XR06201
	8	2	600	10 1/8	1 3/4	9 1/4	62XR08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Precision Ball (28) and Delrin (51) Bearings available. Change "01" to bearing code. Delrin example: 62XR04251.

Pneumatic (27 Industrial Ball Bearing)

SF	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	8	2	210	10 1/8	1 3/4	7 1/4	62SF08227

Polyurethane on Aluminum Crown Tread (01 Roller Bearing)

PD	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	700	5 5/8	1 5/16	6 1/2	62PD04201
	5	2	1050	6 1/2	1 1/2	6 1/2	62PD05201
	6	2	1230	7 1/2	1 3/4	7 1/4	62PD06201
	8	2	1500	10 1/8	1 3/4	8 1/2	62PD08201

Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)

AX	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	5	2	1000	6 1/2	1 1/2	7 1/4	62AX05228
	6	2	1250	7 1/2	1 3/4	8 1/4	62AX06228
	8	2	1500	10 1/8	1 3/4	10 1/2	62AX08228

85 Shore A

Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)

PM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	5	2	1000	6 1/2	1 1/2	7 1/4	62PM05228
	6	2	1250	7 1/2	1 3/4	8 1/4	62PM06228
	8	2	1500	10 1/8	1 3/4	10 1/2	62PM08228

95 Shore A

Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)

PM 80A	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	5	2	1000	6 1/2	1 1/2	7 1/4	62PM0522880A
	6	2	1250	7 1/2	1 3/4	8 1/4	62PM0622880A
	8	2	1500	10 1/8	1 3/4	10 1/2	62PM0822880A

80 Shore A To Specify Rigid or Swivel, insert "R" or "S" before "80A". Example: 62PM08228R80A.

Polyurethane on Cast Iron (01, 07 Roller Bearing)


PY	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	750	5 5/8	1 5/16	10	62PY04201
	5	2	1050	6 1/2	1 3/4	12	62PY05201
	6	2	1200	7 1/2	1 3/4	12	62PY06201
	6	2 1/2	1500	7 1/2	1 3/4	13	62PY06407
	8	2	1500	10 1/8	1 3/4	14	62PY08201
	8	2 1/2	1500	10 1/8	1 3/4	16	62PY08407
	10	2 1/2	1500	11 1/2	1 3/4	17	62PY10407

Polyurethane on Cast Iron (28 Precision Ball Bearing)

PY 80A	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	600	5 5/8	1 5/16	10	62PY0422880A
	5	2	840	6 1/2	1 3/4	13	62PY0522880A
	6	2	960	7 1/2	1 3/4	13	62PY0622880A
	6	2 1/2	1300	7 1/2	1 3/4	13	62PY0642880A
	8	2	1200	10 1/8	1 3/4	16	62PY0822880A
	8	2 1/2	1500	10 1/8	1 3/4	16	62PY0842880A
	10	2 1/2	1500	11 1/2	1 3/4	17	62PY1042880A

To Specify Rigid or Swivel, insert "R" or "S" before "80A". Example: 62PY08228R80A.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

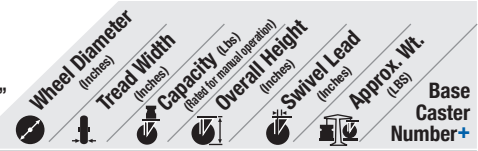

Polyurethane on Polypropylene (01 Roller Bearing)

XA	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	600	5 5/8	1 5/16	6 1/4	62XA04201
	5	2	750	6 1/2	1 1/2	7 1/2	62XA05201
	6	2	900	7 1/2	1 3/4	8 1/4	62XA06201
	8	2	1000	10 1/8	1 3/4	9 1/2	62XA08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.

X-Treme™ Solid Polyurethane (01 Roller Bearing)*

XI	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	1000	5 5/8	1 5/16	6 1/4	62XI04201
	5	2	1000	6 1/2	1 1/2	5 1/2	62XI05201
	6	2	1000	7 1/2	1 3/4	7 3/4	62XI06201
	8	2	1000	10 1/8	1 3/4	9 1/2	62XI08201

*Drawn Cup Roller (02), Bronze (22), Precision Ball (28) Pedestal Precision (29), and Delrin (51) bearings available. Change "01" to other bearing code. Pedestal Precision example: 62XI04229.

X-Treme™ Plus Solid Polyurethane (01 Roller Bearing)*

XP	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	1400	5 5/8	1 5/16	6 1/4	62XP04201
	5	2	1200	6 1/2	1 1/2	6 3/4	62XP05201
	6	2	1400	7 1/2	1 3/4	7 3/4	62XP06201
	8	2	1200	10 1/8	1 3/4	9 1/2	62XP08201

*Drawn Cup Roller (02), Bronze (22), Precision Ball (28) Pedestal Precision (29), and Delrin (51) bearings available. Change "01" to other bearing code. Pedestal Precision example: 62XP04229.

Phenolic (01, 07 Roller Bearing)

TM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	800	5 5/8	1 5/16	6 1/4	62TM04201
	5	2	1000	6 1/2	1 1/2	6 3/4	62TM05201
	6	2	1200	7 1/2	1 3/4	7 3/4	62TM06201
	6	2 1/2	1500	7 1/2	1 3/4	9	62TM06407
	8	2	1400	10 1/8	1 3/4	9 1/2	62TM08201
	8	2 1/2	1500	10 1/8	1 3/4	11 1/4	62TM08407
	10	2 1/2	1500	11 1/2	1 3/4	13	62TM10407

Maxim® (01 Roller Bearing)*

NG	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
	4	2	800	5 5/8	1 5/16	6 1/4	62NG04201
	5	2	1000	6 1/2	1 1/2	6 3/4	62NG05201
	6	2	1200	7 1/2	1 3/4	7 3/4	62NG06201
	8	2	1400	10 1/8	1 3/4	9 1/4	62NG08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Drawn Cup Roller (02), Bronze (22), Pedestal Precision (29), and Delrin (51) bearings available. Change "01" to other bearing code. Pedestal Precision example: 62NG04229.

Continue on next page >>