


+ For swivel models add "S", for rigid model add "R" to end of base caster number.

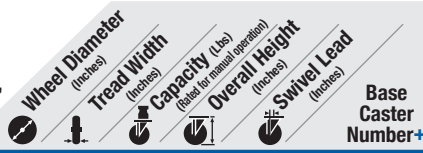

**Polypropylene (01 Roller Bearing)\***

<b>PB</b>	4	2	450	5 5/8	1 3/16	<b>110PB04201</b>
	5	2	650	6 1/2	1 3/8	<b>110PB05201</b>
	6	2	750	7 1/2	1 9/16	<b>110PB06201</b>
	8	2	1000	10 1/8	2 1/4	<b>110PB08201</b>

Plain bore (41) available. Change "01" to other code. Plain bore example: 110RR04241. If plain bore specified 5" diameter capacity is 450 lbs, 6" diameter is 650 lbs, 8" diameter is 850 lbs.

**Retort High Temp Polypropylene (01 Roller Bearing)**

<b>RW</b>	4	2	500	5 5/8	1 3/16	<b>110RW04201</b>
	5	2	650	6 1/2	1 3/8	<b>110RW05201</b>
	6	2	700	7 1/2	1 9/16	<b>110RW06201</b>
	8	2	900	10 1/8	2 1/4	<b>110RW08201</b>

**Polyurethane on Aluminum Flat Tread (01 Roller Bearing)**

<b>PD</b>	4	2	700	5 5/8	1 3/16	<b>110PD04201</b>
	5	2	1050	6 1/2	1 3/8	<b>110PD05201</b>
	6	2	1230	7 1/2	1 9/16	<b>110PD06201</b>
	8	2	1500	10 1/8	2 1/4	<b>110PD08201</b>

**Polyurethane on Cast Iron (28 Precision Ball Bearing)\***

<b>PY</b>	4	2	750	5 5/8	1 3/16	<b>110PY04201**</b>
	5	2	1050	6 1/2	1 3/8	<b>110PY05228</b>
	6	2	1200	7 1/2	1 9/16	<b>110PY06228</b>
	8	2	1500	10 1/8	2 1/4	<b>110PY08228</b>

\*Available with Precision Ball (28) bearings (\*\*except 4" diameter models which are not available with (28) bearing, Roller (01) bearing shown). Change "28" or "01" to other bearing code. Example: 110PY05229.

**Polyurethane on Cast Iron (28 Precision Ball Bearing)\***

<b>PY 80A</b>	4	2	600	5 5/8	1 3/16	<b>110PY0420180A**</b>
	5	2	840	6 1/2	1 3/8	<b>110PY0522880A</b>
	6	2	960	7 1/2	1 9/16	<b>110PY0622880A</b>
	8	2	1200	10 1/8	2 1/4	<b>110PY0822880A</b>

To Specify Rigid or Swivel, insert "R" or "S" before "80A". Example: 110PY04201R80A.

\*Available with Precision Ball (28) bearings (\*\*except 4" diameter models which are not available with (28) bearing, Roller (01) bearing shown). Change "28" or "01" to other bearing code. Example: 110PY0522980A.

**Aubin Industries Swivel-EAZ® Crown Tread (28 Prec. Ball Bearing)**

<b>EY</b>	4	2	675	5 5/8	1 3/16	<b>110EY04228</b>
	5	2	900	6 1/2	1 3/8	<b>110EY05228</b>
	6	2	1425	7 1/2	1 9/16	<b>110EY06228</b>
	8	2	2000	10 1/8	2 1/4	<b>110EY08228</b>

**Aubin Industries Swivel-EAZ® Flat Tread (28 Precision Ball Bearing)**

<b>EZ</b>	4	2	900	5 5/8	1 3/16	<b>110EZ04228</b>
	5	2	1400	6 1/2	1 3/8	<b>110EZ05228</b>
	6	2	1900	7 1/2	1 9/16	<b>110EZ06228</b>
	8	2	2000	10 1/8	2 1/4	<b>110EZ08228</b>

**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

<b>AX</b>	4	2	700	5 5/8	1 3/16	<b>110AX04228</b>
	5	2	1000	6 1/2	1 3/8	<b>110AX05228</b>
	6	2	1250	7 1/2	1 9/16	<b>110AX06228</b>
	8	2	1500	10 1/8	2 1/4	<b>110AX08228</b>


85 Shore A

**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

<b>PM</b>	5	2	1000	6 1/2	1 3/8	<b>110PM05228</b>
	6	2	1250	7 1/2	1 9/16	<b>110PM06228</b>
	8	2	1500	10 1/8	2 1/4	<b>110PM08228</b>

95 Shore A

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

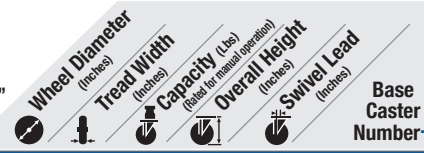

**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

<b>PM 80A</b>	5	2	1000	6 1/2	1 3/8	<b>110PM0522880A</b>
	6	2	1250	7 1/2	1 9/16	<b>110PM0622880A</b>
	8	2	1500	10 1/8	2 1/4	<b>110PM0822880A</b>

80 Shore A To Specify Rigid or Swivel, insert "R" or "S" before "80A". Ex: 110PM08228R80A.

**Polyurethane on Heavy Duty Cast Iron (28 Precision Ball Bearing)**

<b>PF</b>	6	2	2000	7 1/2	1 9/16	<b>110PF06228</b>
	8	2	2000	10 1/8	2 1/4	<b>110PF08228</b>

95 Shore A

**Magnum Polyurethane on Aluminum Round Tread (28 Prec. Ball Bearing)**

<b>UA</b>	4	2	700	5 5/8	1 3/16	<b>110UA04228</b>
	6	2	750	7 1/2	1 9/16	<b>110UA06228</b>
	8	2	900	10 1/8	2 1/4	<b>110UA08228</b>

Blue Shore 95A Standard UA Black Shore 70A UA Red Shore 80A UA Orange Shore 73D

4"=400 capacity 4"=500 capacity 4"=900 capacity  
6"=410 capacity 6"=500 capacity 6"=1,000 capacity  
8"=500 capacity 8"=800 capacity 8"=1,200 capacity

To order color/durometer enter durometer code at end of model. Red wheel example: 110UA08228S80A. To specify Rigid or Swivel, insert "R" or "S" before last 3 digit durometer code. Ex: 110UA08228R80A.

**Polyurethane on Polypropylene (29 Pedestal Precision Bearing)**

<b>XA</b>	4	2	600	5 5/8	1 3/16	<b>110XA04229</b>
	5	2	750	6 1/2	1 3/8	<b>110XA05229</b>
	6	2	900	7 1/2	1 9/16	<b>110XA06229</b>
	8	2	1200	10 1/8	2 1/4	<b>110XA08229</b>

Prevenz™ antimicrobial models available.

**X-Treme™ Plus Solid Polyurethane (29 Pedestal Precision Bearing)\***

<b>XP</b>	4	2	1400	5 5/8	1 3/16	<b>110XP04229</b>
	5	2	1200	6 1/2	1 3/8	<b>110XP05229</b>
	6	2	1400	7 1/2	1 9/16	<b>110XP06229</b>
	8	2	1200	10 1/8	2 1/4	<b>110XP08229</b>

\*All 110 bearings listed are available. Precision Ball Bearing example: 110XP04228.

**Solid Elastomer (28 Precision Ball Bearing)**

<b>SE</b>	4	2	1000	5 5/8	1 3/16	<b>110SE04228</b>
	5	2	1000	6 1/2	1 3/8	<b>110SE05228</b>
	6	2	1200	7 1/2	1 9/16	<b>110SE06228</b>
	8	2	1200	10 1/8	2 1/4	<b>110SE08228</b>

**Phenolic (01 Roller Bearing)**

<b>TM</b>	4	2	800	5 5/8	1 3/16	<b>110TM04201</b>
	5	2	1000	6 1/2	1 3/8	<b>110TM05201</b>
	6	2	1200	7 1/2	1 9/16	<b>110TM06201</b>
	8	2	1400	10 1/8	2 1/4	<b>110TM08201</b>

**Straight Sided Phenolic (01 Roller Bearing)**

<b>TH</b>	4	2	1000	5 5/8	1 3/16	<b>110TH04201</b>
	5	2	1200	6 1/2	1 3/8	<b>110TH05201</b>
	6	2	1500	7 1/2	1 9/16	<b>110TH06201</b>

**Maxim® (01 Roller Bearing)\***

<b>NG</b>	4	2	800	5 5/8	1 3/16	<b>110NG04201</b>
	5	2	1000	6 1/2	1 3/8	<b>110NG05201</b>
	6	2	1200	7 1/2	1 9/16	<b>110NG06201</b>
	8	2	1400	10 1/8	2 1/4	<b>110NG08201</b>

\*Pedestal Precision ball (29) bearings available. Change "01" to other bearing code. Example: 110NG06229.

110 SERIES • CAPACITY TO 2000

HEAVY DUTY KINGPINLESS