# 1 Series

TOP PLATE Swivel & Rigid

Capacity up to **75 lbs each**

Colson 3 YEAR WARRANTY

RoHS Compliant — Environmentally Friendly

NSF COMPONENT

## Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 5/16" shouldered axle with 1/4" nut
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

## Standard Mounting

- Rigid caster available with 3" diameter wheel only

## Standard Dimensions

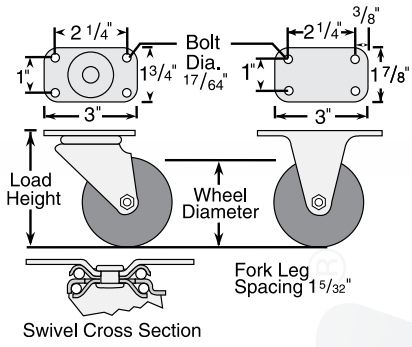


## Colson 1 Series Casters • Top Plate Swivel and Rigid • Capacity to 75 lbs each

| Wheel Dia. | Tread Width | Capacity Each (Pounds) | Wheel Descriptions | Wheel Bearing | Swivel Top Plate Caster Models | Rigid Top Plate Caster Models | Load Height | Swivel Radius | Weight (Pounds) |
|---|---|---|---|---|---|---|---|---|---|
| 1 5/8" | 7/8" | 60 | Performa Rubber | Delrin | 1.01656.441 | — | 2 9/16" | 1 3/4" | 1/2 |
| | | 75 | Polyolefin | Delrin | 1.01656.52 | — | 2 9/16" | 1 3/4" | 1/2 |
| 2" | 7/8" | 75 | Performa Rubber | Delrin | 1.02256.441 | — | 2 3/4" | 1 15/16" | 1/2 |
| | | | Polyolefin | Delrin | 1.02256.52 | — | 2 3/4" | 1 15/16" | 1/2 |
| | | | Cushion Rubber | Ball | 1.02256.45 | — | 2 3/4" | 1 15/16" | 5/8 |
| | | | Hard Rubber | Ball | 1.02256.55 | — | 2 3/4" | 1 15/16" | 5/8 |
| 3" | 7/8" | 75 | Performa Rubber | Delrin | 1.03056.441 | 1.03010.441 | 3 7/8" | 2 9/16" | 3/4 |
| | | | Polyurethane HI-TECH | Delrin | 1.03056.91 | 1.03010.91 | 3 7/8" | 2 9/16" | 3/4 |
| | | | Polyolefin | Delrin | 1.03056.53 | 1.03010.53 | 3 7/8" | 2 9/16" | 3/4 |

## Caster Brake

**Side Lock**
(See page 96) Available on all 3" swivel models. Field installable (Specify **BRK3**; Example: 1.03056.53 BRK3).

## Wheel Selection

*See the Performa Advantage on Page 67.*

## Fork Option

**NSF Listed for Food Service Industry**
All models except thread guards.

**Forks Only**
To order caster forks only use 1st 6 digits of model numbers (Example: 1.01656).

## Wheel Option

**Thread Guards**
(See page 108) Available on all 3" models. Brake & NSF options cannot be used with thread guards (Specify **TG1** for metal; Example: 1.01656.441 TG1).



3D CAD Models & Data Sheets
www.colsoncaster.com/casters