

# Wheel Overview

## Nylon Wheels

**Pages:** 84-85

**Capacity:**

600 lbs to 7,200 lbs each

**For Caster Series:** 4, 6, 7 and 8

**Wheel Diameters:** 3-1/4", 4", 5", 6", 8" and 10"

**Tread Width:** 1-1/2", 2" and 3"



Moldon Nylon  
on Aluminum  
(p. 84)

Commander HD  
(p. 84)

Maxim®  
(p. 85)

## High Temperature

**Pages:** 86-87


**Capacity:**

225 lbs to 1,100 lbs each

**For Caster Series:** 2, 3, 4 and 6

**Wheel Diameters:** 3", 3-1/2", 4", 5", and 6"

**Tread Width:** 1-1/4", 1-1/2", and 2"

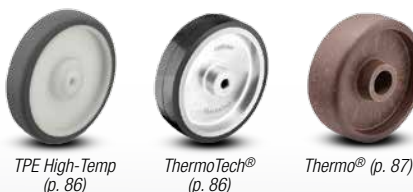

TPE High-Temp  
(p. 86)

ThermoTech®  
(p. 86)

Thermo® (p. 87)

## Polyolefin

**Pages:** 88-89

**Capacity:**

75 lbs to 900 lbs each

**For Caster Series:** 1, 2, 3, 4 and 6

**Wheel Diameters:** 1-5/8", 2", 2-1/2", 3", 3-1/2", 4", 5", 6", and 8"

**Tread Width:** 7/8", 1-1/4", 1-1/2", and 2"



Polyolefin (p. 88-89)

## Phenolic

**Pages:** 90-91

**Capacity:**

300 lbs to 3,500 lbs each

**For Caster Series:** 2, 3, 4, 6, 7, and 8

**Wheel Diameters:** 2-1/2", 3", 3-1/4", 4", 5", 6", 8", 10", and 12"

**Tread Width:** 1-7/16", 1-15/32", 1-1/2", 2", 2-1/2", and 3"



Phenolic (p. 91-91)

## Metal Wheels

**Pages:** 92-95

**Capacity:**

200 lbs to 6,000 lbs each

**For Caster Series:** 2, 3, 4, 6, 7, and 8

**Wheel Diameters:** 2-1/2", 3", 3-1/2", 4", 5", 6", 8", 10", and 12"

**Tread Width:** 1-1/4", 1-1/2", 2", 2-1/2", and 3"



Cast Iron (p. 92-93)

Forged Steel (p. 94)

V-Groove (p. 95)